



Technical Data

TEROL® 1465 POLYOL

Modified Aromatic Polyester Polyol

APPLICATION

TEROL 1465 is a high functionality, low viscosity polyester polyol recommended for use in spray, pour-in-place (PIP) and panel systems, when enhanced physical properties and compatibility with water is desired. In spray systems, this product has been shown to be especially useful in cold weather situations, providing excellent adhesion to substrates. TEROL 1465 can also be used with hydrocarbon and HFC blowing agents.

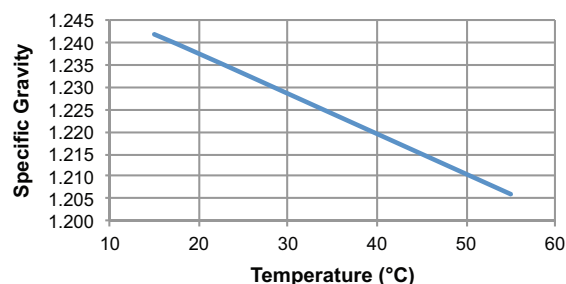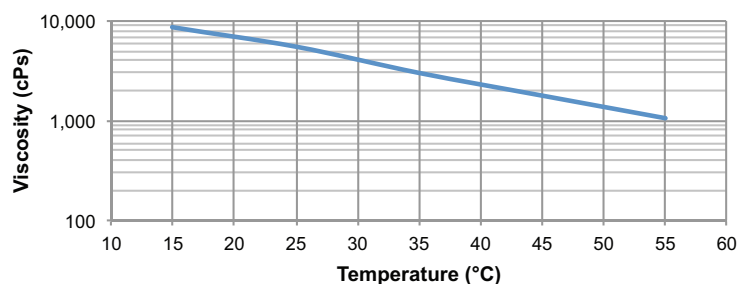

	Typical Properties	Specifications	
Hydroxyl No. (mg KOH / g)	295	285 - 305	Pre-consumer.....7.2% Recycle Material ¹
Water (% by wt.)	0.05	≤ 0.15	
Acid No. (mg KOH / g)	1.0	≤ 2.0	Post-consumer.....18.6% Recycle Material ²
Viscosity @ 25° C (cPs)	5,530	4,500 - 6,500	
Functionality	2.40		Rapidly.....0.0% Renewable Materials ³
Specific Gravity @ 25° C	1.233		

STORAGE AND HANDLING

As with all industrial chemicals, care should be exercised in the handling of this material. In the event of contact with skin or eyes, follow the instructions on our MSDS. TEROL Aromatic Polyester Polyols should be stored in tightly closed containers. Storage temperatures of 15 - 50°C are recommended for a shelf life of 6 (six) months.

1 Pre-consumer Recycle Material - materials diverted from waste stream in a manufacturing process as defined by International Standard ISO 14021.

2 Post-consumer Recycle Material - materials generated by households or by commercial industrial and institutional facilities in their role as end-users of the product which can no longer be used for its intended purpose as defined by International Standard ISO 14021.

3 Rapidly Renewable Materials - materials made from plants that are typically harvested with a ten year cycle or shorter as defined by LEED for New Construction & Major Renovations, Version 2.2.

American headquarters

Huntsman
10003 Woodloch Forest Drive
The Woodlands
Texas 77380
USA
Telephone +1 281 719 6000
TEROL Polyol Sales +1 713 924 6400
Fax +1 281 719 4953

Asian headquarters

Huntsman
No. 452 Wen Jing Road
Minhang Development Zone
Shanghai 200245
Telephone +86 21 6462 6868
Fax +86 21 6462 1234

European headquarters

Huntsman
Everslaan 45
B-3078 Everberg
Belgium
Telephone +32 2 758 9952
Fax +32 2 758 7268

Huntsman Polyurethanes warrants only that its products meet the specifications agreed with the buyer. Typical properties, where stated, are to be considered as representative of current production and should not be treated as specifications.

While all the information and recommendations in this publication are to the best of our knowledge, information and belief accurate at the date of publication, NO GUARANTY, WARRANTY OR REPRESENTATION IS MADE, INTENDED OR IMPLIED AS TO THE CORRECTNESS OR SUFFICIENCY OF ANY INFORMATION OR RECOMMENDATION OR AS TO THE MERCHANTABILITY, SUITABILITY OR FITNESS OF ANY PRODUCTS FOR ANY PARTICULAR USE OR PURPOSE.

IN ALL CASES, IT IS THE RESPONSIBILITY OF THE USER TO DETERMINE THE APPLICABILITY OF SUCH INFORMATION AND RECOMMENDATIONS AND THE SUITABILITY OF ANY PRODUCT FOR ITS OWN PARTICULAR PURPOSE. NOTHING IN THIS PUBLICATION IS TO BE CONSTRUED AS RECOMMENDING THE INFRINGEMENT OF ANY PATENT OR OTHER INTELLECTUAL PROPERTY RIGHT AND NO LIABILITY ARISING FROM ANY SUCH INFRINGEMENT IS ASSUMED. NOTHING IN THIS PUBLICATION IS TO BE VIEWED AS A LICENCE UNDER ANY INTELLECTUAL PROPERTY RIGHT.

Products may be toxic and require special precautions in handling. The user should obtain Safety Data Sheets from Huntsman Polyurethanes containing detailed information on toxicity, together with proper shipping, handling and storage procedures, and should comply with all applicable safety and environmental standards.

Hazards, toxicity and behaviour of the products may differ when used with other materials and are dependent on the manufacturing circumstances or other processes. Such hazards, toxicity and behaviour should be determined by the user and made known to handlers, processors and end users.

Huntsman Polyurethanes is an international business unit of Huntsman International LLC. Huntsman Polyurethanes trades through Huntsman affiliated companies in different countries such as Huntsman International LLC in the USA and Huntsman Holland BV in Western Europe.

Except where explicitly agreed otherwise, the sale of products referred to in this publication is subject to the general terms and conditions of sale of Huntsman International LLC or of its affiliated companies.

TEROL[®] is a registered trademark of Huntsman Corporation or an affiliate thereof in one or more, but not all, countries.

Copyright © 2013 Huntsman Corporation or an affiliate thereof. All rights reserved.