


# MINIMIZE COSTS WITH ZERO COMPROMISE

**EPIBOND® 200 A/B  
structural adhesive  
increases throughput by  
up to 50%, and allows  
parts to be completed  
in one working shift.**

Manufacturers and operators across the aerospace value chain are under pressure to reduce costs without sacrificing performance. Maximizing assembly productivity and throughput are key to achieving this goal.

EPIBOND® 200 A/B adhesive provides up to a 50% increase in throughput, thanks to its 33% faster handling time and better non-tack performance. Tack-free in 5-8 hours, the adhesive can be used in continuous assembly environments and parts can be completed in one working shift.

Flexible yet tough over a wide temperature range, EPIBOND® 200 A/B adhesive can be used for many different applications to provide further production time-savings. It is also easy to mix and apply – even vertically or overhead – with a true 1:1 mix ratio and non-sag.

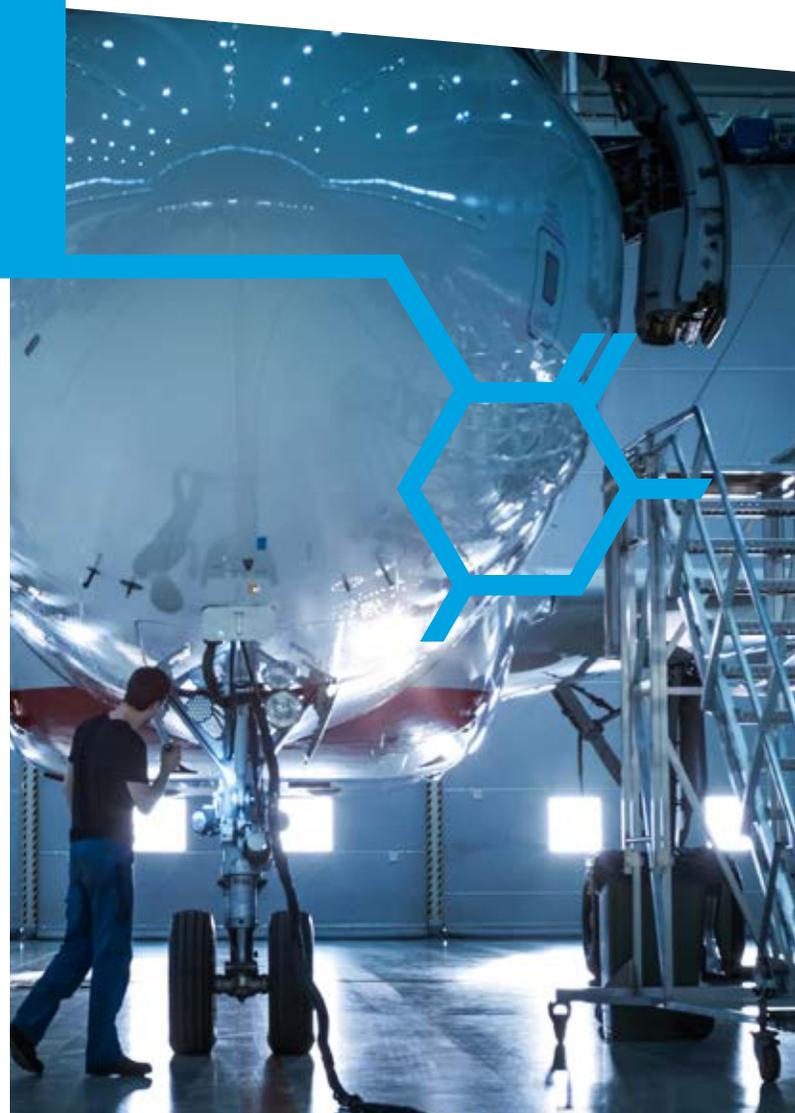

## WHAT MAKES EPIBOND® 200 A/B STRUCTURAL ADHESIVE DIFFERENT?

EPIBOND® 200 A/B adhesive is a two-component, fast-setting, sag-resistant epoxy structural adhesive designed for demanding applications requiring high strength and flexibility.

### SUPERIOR PERFORMANCE

↑ **150%**

Up to 150% improvement in strength retention at high temperatures

**6-8**hrs

Handling time

**5-8**hrs

Tack-free time

↑ **33%**

Up to 33% better non-sag performance

**1:1** mix ratio


True 1:1 mix ratio (pbw or pbv)

### INCREASED THROUGHPUT

↑ **50%**

Up to 50% improvement in throughput

### DESIGNED FOR PRODUCTIVITY

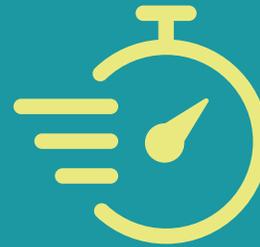

Saves time in assembly operations

Easy to use  
Versatile applications



For more information:  
[www.aralditeadhesives.com](http://www.aralditeadhesives.com)

#### Legal information

All trademarks mentioned are either property of or licensed to Huntsman Corporation or an affiliate thereof in one or more, but not all, countries. Sales of the product described herein ("Product") are subject to the general terms and conditions of sale of either Huntsman Advanced Materials LLC, or its appropriate affiliate including without limitation Huntsman Advanced Materials (Europe) BVBA, Huntsman Advanced Materials Americas Inc., or Huntsman Advanced Materials (Hong Kong) Ltd. or Huntsman Advanced Materials (Guangdong) Ltd. ("Huntsman"). The following supersedes Buyer's documents. While the information and recommendations included in this publication are, to the best of Huntsman's knowledge, accurate as of the date of publication, NOTHING CONTAINED HEREIN IS TO BE CONSTRUED AS A REPRESENTATION OR WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHTS, OR WARRANTIES AS TO QUALITY OR CORRESPONDENCE WITH PRIOR DESCRIPTION OR SAMPLE, AND THE BUYER ASSUMES ALL RISK AND LIABILITY WHATSOEVER RESULTING FROM THE USE OF SUCH PRODUCT, WHETHER USED SINGLY OR IN COMBINATION WITH OTHER SUBSTANCES. No statements or recommendations made herein are to be construed as a representation about the suitability of any Product for the particular application of Buyer or user or as an inducement to infringe any patent or other intellectual property right. Data and results are based on controlled conditions and/or lab work. Buyer is responsible to determine the applicability of such information and recommendations and the suitability of any Product for its own particular purpose, and to ensure that its intended use of the Product does not infringe any intellectual property rights. The Product may be or become hazardous. Buyer should (i) obtain Material Safety Data Sheets and Technical Data Sheets from Huntsman containing detailed information on Product hazards and toxicity, together with proper shipping, handling and storage procedures for the Product, (ii) take all steps necessary to adequately inform, warn and familiarize its employees, agents, direct and indirect customers and contractors who may handle or be exposed to the Product of all hazards pertaining to and proper procedures for safe handling, use, storage, transportation and disposal of and exposure to the Product and (iii) comply with and ensure that its employees, agents, direct and indirect customers and contractors who may handle or be exposed to the Product comply with all safety information contained in the applicable Material Safety Data Sheets, Technical Data Sheets or other instructions provided by Huntsman and all applicable laws, regulations and standards relating to the handling, use, storage, distribution and disposal of and exposure to the Product. Please note that products may differ from country to country. If you have any queries, kindly contact your local Huntsman representative.

EPIBOND® is a trademark of Huntsman Corporation or an affiliate thereof in one or more, but not all, countries.  
© 2019 Huntsman Corporation. All rights reserved.

#### Americas

Huntsman Advanced Materials  
Americas Inc.  
10003 Woodloch Forest Drive  
The Woodlands, TX 77380, USA  
Tel.: +1 888 564 9318  
Fax: +1 281 719 4047



#### Asia Pacific & India

Huntsman Advanced Materials  
(Guangdong) Co., Ltd,  
Shanghai Branch Office  
455 Wenjing Road, Minhang District  
Shanghai 200245, P.R. China  
Tel: +86 21 3357 6588  
Fax: +86 21 3357 6547

#### Europe, Middle East & Africa

Huntsman Advanced Materials  
(Switzerland) GmbH  
Klybeckstrasse 200  
P.O. Box  
4002 Basel, Switzerland  
Tel.: +41 61 299 1111  
Fax: +41 61 299 1112